

Datasheet

mSATA

3TG6-P series

- SATA III solution for industrial field
- High IOPS
- iSMART disk health monitoring
- AES-256 encryption
- End to end data path protection
- iData Guard for abnormal power failure
- DEVSLP supported



Introduction

Innodisk mSATA 3TG6-P is SATA III 6Gb/s solid state disk, which delivers excellent performance, especially in random data transfer rate, and which offers reliability making it the ideal solution for a variety of applications, including embedded system, industrial computing, and enterprise field. 3TG6-P mSATA not only performs unmatched performance, but also designed with Innodisk owned technical knowhow to ensure the data integrity and highest levels of reliability.


mSATA 3TG6-P series

Drawing


Contact us for more information about the mSATA 3TG6-P

Innodisk is a service-driven provider of industrial embedded flash and DRAM storage products and technologies, with a focus on the industrial/embedded, aerospace and defense, and cloud computing industries.

TSOP Models: 128GB~256GB

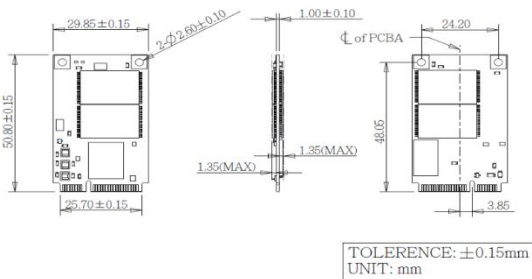

BGA Model: 512GB~1TB

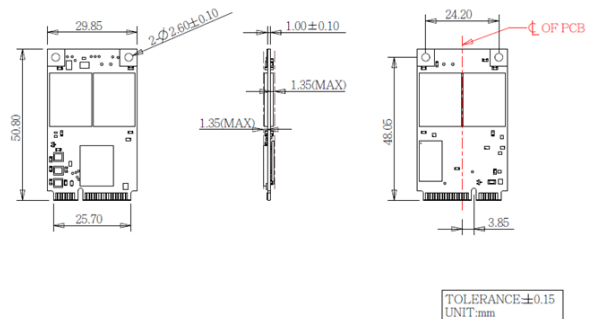

Specifications

Interface	SATA III
Flash Type	3D TLC
Capacity	128GB~2TB
Max. Channels	4
Sequential R/W (MB/sec, max.)*	504 / 404 MB/s
4KB Random (QD32) R/W (IOPS)*	54,500/56,800
Max. Power Consumption	2.8W
Thermal Sensor	✓
External DRAM Buffer	✓
AES encryption	✓
ATA Security	✓
S.M.A.R.T.	✓
DEVSLP Mode	✓ (min. power consumption 3mW)
Dimension (WxLxH)	29.85 X 50.80 X 3.7 mm
Environment	Vibration: 20G @7~2000Hz Shock: 1500G @ 0.5ms Storage Temperature: -55°C ~ +95°C MTBF: 3 million hours
* Sequential performance based on CystalDiskMark 5.1.2 with file size 1000MB	

Headquarters (Taiwan)

5F., No.237, Sec. 1, Datong Rd.,
Xizhi Dist., New Taipei City,
Taiwan (R.O.C.)
Tel: +886-2-77033000
Email: sales@innodisk.com

Branch Offices:

USA
usasales@innodisk.com
+1-510-770-9421
Europe
eusales@innodisk.com
+31-40-3045-400
Japan
jpsales@innodisk.com
+81-3-6667-0161
China
sales_cn@innodisk.com
+86-755-21673689
www.innodisk.com

© 2018 Innodisk Corporation.
All right reserved. Specifications
are subject to change without
prior notice.

Ordering Information (Please refer to TPS for detail)

Operation Temp.	128GB	256GB	512GB	1TB	2TB
Standard Grade (0°C ~ +70°C)	DGMSR- A28M71EC1QL	DGMSR- B56M71%*QL	DGMSR- C12M71%*QL	DGMSR- 01TM71GCAQL	DGMSR- 02TM71GCAQQ
Industrial Grade (-40°C ~ +85°C)	X	DGMSR- B56M71GWAQL	DGMSR- C12M71GWAQL	DGMSR- 01TM71GWAQL	DGMSR- 02TM71GWAQQ

%. E: 64 layers 3D TLC; G: 96 layers 3D TLC/ *. PCB version control

innodisk

www.innodisk.com