

# EKI-9508E-H

# EKI-9508E-L

## EN50155 8-Port M12 Unmanaged Ethernet Switch 72/96/110 V<sub>DC</sub>

## EN50155 8-Port M12 Unmanaged Ethernet Switch 24/48 V<sub>DC</sub>



CE FCC

### Features

- Complies with EN50155
- 8 M12 D-coded 10/100Mbps ports
- Power input  
EKI-9508E-H: 72/96/110 V<sub>DC</sub>  
EKI-9508E-L: 24/48 V<sub>DC</sub>
- Operating Voltage  
EKI-9508E-H: 50.4~137.5 V<sub>DC</sub>  
EKI-9508E-L: 16.8~60 V<sub>DC</sub>
- M12 connector with IP40 protection
- Operating temperature range -40 ~ 70°C

### Introduction

The EKI-9500 series switch is designed for railway application with rugged and high EMC performance, being suitable for networking solution for rolling stock and wayside applications. The EKI-9500 series provides M12 connectors for Ethernet/ console/ relay/ power-input connections to ensure tight & robust connectivity, and thus to guarantee reliable operation against environmental disturbances such as vibration and shock on train. The EKI-9508E-H/L is an Ethernet switch that provides 8 x Fast Ethernet M12 D-code port interface for all kinds of Ethernet connection. EKI-9508E-H/L features a "slim" design which can be easily deployed with its slender size and make the network deployment easier in crowded carriage/ cabinet.

### Specifications

#### Interface

- I/O Port 8 x 10/100BASE-T M12 D-coded
- Power Connector M12 A-coded

#### Physical

- Enclosure Metal
- Protection Class IP40
- Installation Wall mount
- Dimensions (W x D x H) 122.5 x 179.4 x 71.8 mm
- Weight 1.3kg

#### LED Display

- System LEDs PWR1, PWR2, SYS

#### Environment

- Operating Temperature -40 ~ 70°C
- Storage Temperature -40 ~ 85°C
- Ambient Relative Humidity 10 ~ 95% (non-condensing)

#### Power

- Power Consumption ~5 W (system)
- Power Input  
EKI-9508E-H: 72/96/110 V<sub>DC</sub>  
EKI-9508E-L: 24/48 V<sub>DC</sub>
- Operating Voltage  
EKI-9508E-H: 50.4~137.5 V<sub>DC</sub>  
EKI-9508E-L: 16.8~60 V<sub>DC</sub>  
Dual inputs Supports Overload Current Protection  
Supports Reverse Polarity Protection

#### Certification


- EMI FCC Part 15 Subpart B Class A  
CE EN55032 (CISPR)  
EN55024 Class A
- EMS EN61000-4-2 (ESD), EN61000-4-3 (RS),  
EN61000-4-4 (EFT), EN61000-4-5 (surge),  
EN61000-4-6 (CS)
- Shock IEC 61373
- Freefall IEC 60068-2-32
- Vibration IEC 61373
- Rail Traffic EN50155; EN50121-3-2

#### L2 Features

- L2 MAC Address 8K
- Jumbo Frame 9 KB

## Dimensions

Unit: mm [in.]

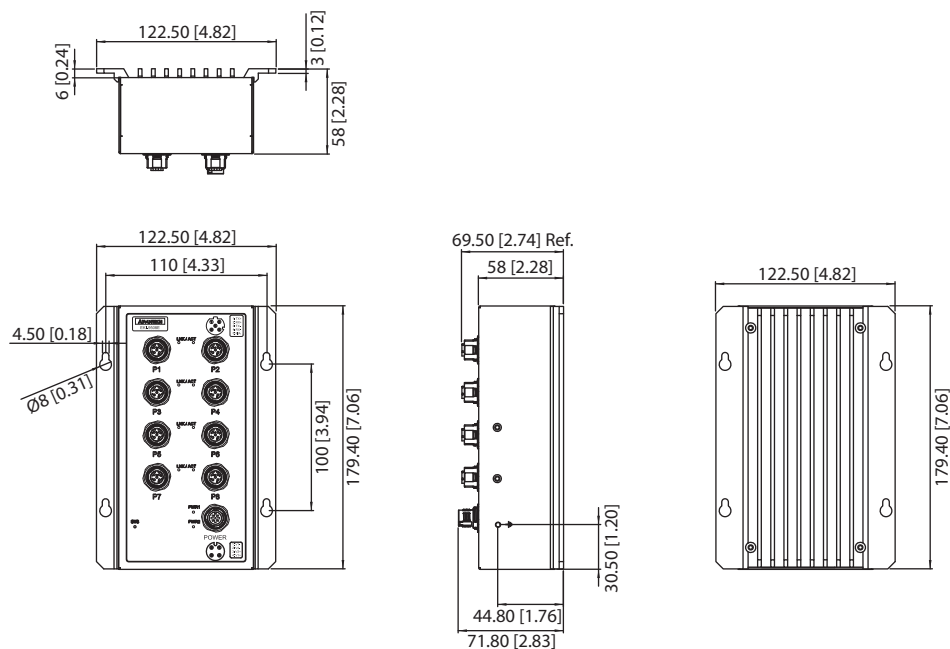

## Ordering Information

- **EKI-9508E-H-AE** Layer 2 switch, 8 x M12 fast Ethernet, 72/96/110 V<sub>DC</sub> dual power input
- **EKI-9508E-L-AE** Layer 2 switch, 8 x M12 fast Ethernet, 24/48 V<sub>DC</sub> dual power input