

ARK-2250S

6th Gen Intel Core i7-6822EQ QC/i5-6442EQ QC
Rugged FullHD NVR



Features

- Intel i7-6822EQ QC/ Intel i5-6442EQ QC SoC
- Extreme graphic performance, support up to 1080p 240fps video encode&decode
- Stackable extension design, option extension kit for applications
- Isolated 12 ~ 24V_{DC} wide-range power input
- Built-in G-Sensor for tamper protection
- Option GPS for GIS application
- Diversity Communication Extensible, ex. WLAN, WWAN
- Anti-vibration & shock proof, certified by MIL-STD-810G
- Wide operating temperature support, up to -20 ~ 70 °C
- Certified for general standard, CE, FCC, CB, UL, CCC and BSMI
- Built-in Advantech remote management software WISE-PaaS/RMM



WISE-PaaS/RMM iManager



Specifications


		ARK-2250S-U0A1E	ARK-2250S-S9A1E
Processor System	CPU	Intel i7-6822EQ QC SoC	Intel i5-6442EQ QC SoC
	Frequency	2.0GHz	1.9GHz
	L2 Cache	2 MB	
	BIOS	AMI EFI	
Memory	Technology	DDR4 2133MHz	
	Max. Capacity	32G	
	Socket	2 x 260-pin SO-DIMM	
Graphics	Chipset	QM170	
	Graphic Engine	DirectX 11.3, OGL 4.4, OCL 2.1 Encode: H.264, MPEG2/4, VC1, WMV9 Decode: H.264, MPEG2 EHVC: H.265	
	VGA	Up to 1920 x 1200 @ 60Hz	
	HDMI	HDMI 1.4a for HD video playback, 1080P at 60Hz	
	Dual Display	Yes, VGA + HDMI	
	Ethernet	LAN1	10/100/1000 Mbps Intel i210 GbE, support Wake On Lan
Audio	LAN2	10/100/1000 Mbps Intel i219 GbE, support Wake On Lan	
	Interface	Realtek ALC888S, High Definition Audio. Line-out, Mic-in, Line-in	
	Serial Ports	3 x RS-232/422/485 port with auto flow control	
IO Interface	USB Interface	3 x USB3.0 Type A	
	GPIO	4 x DI & 4 x DO w/ 1.5KV isolation, Input Voltage: 0 to 30 V _{DC} , Output Current: Max. 500 mA per channel, On-state Voltage: 24 V _{DC} nominal, open collector to 30 V _{DC}	
	CANBus	Optional	
Other	Watchdog timer	255 levels timer interval, setup by software	
	GPS (Option)	On board standalone GPS, support GPS, GLONASS, BeiDou and QZSS signals (Option)	
	G-Sensor	On board high resolution G-Sensor, up to 13-bit resolution at ±16g	
Expansion	Mini PCIe	#1, Full-size Mini PCIe (SATA/PCle/USB) w/external SIM socket #2, Full-size Mini PCIe (PCle/USB) w/external SIM socket #3, M.2 2230 E key	
	Storage	SSD/HDD	1 x 2.5" SATA drive bay
	mSATA	1 x full size mSATA socket (Mini PCIe #1)	
Software Support	Microsoft Windows	Win7, WES7, Win8, WSE8, Win10	
	Linux	Support by project	
Power Requirement	Power Type	ATX	
	Power Input Voltage	9~36V _{DC} w/isolation	
	Isolation	1.5 KV	
Power Consumption	Typical	TBD	
	Max.	TBD	
Mechanical	Construction	Aluminum housing	
	Mounting	Wall mounting kit	
	Dimensions (W x H x D)	260 x 73 x 160.2mm	
	Weight	3.2 Kg	
Environment	Operating Temperature	With extended temperature peripherals: -20 ~ 70 °C with 0.7m/s air flow	
	Storage Temperature	- 40 ~ 85 °C (-40 ~ 185 °F)	
	Relative Humidity	95% @ 40 °C (non-condensing)	
	Vibration During Operation	MIL-STD-810G, Method 514.6	
	Shock During Operation	MIL-STD-810G, Method 516.6	
	EMC	CE, FCC Class B, CCC, BSMI	
Safety Certifications	UL, CCC, BSMI, CB		

Dimensions


Unit: mm

ARK-2250S


ARK-2250S+AMK-R100E

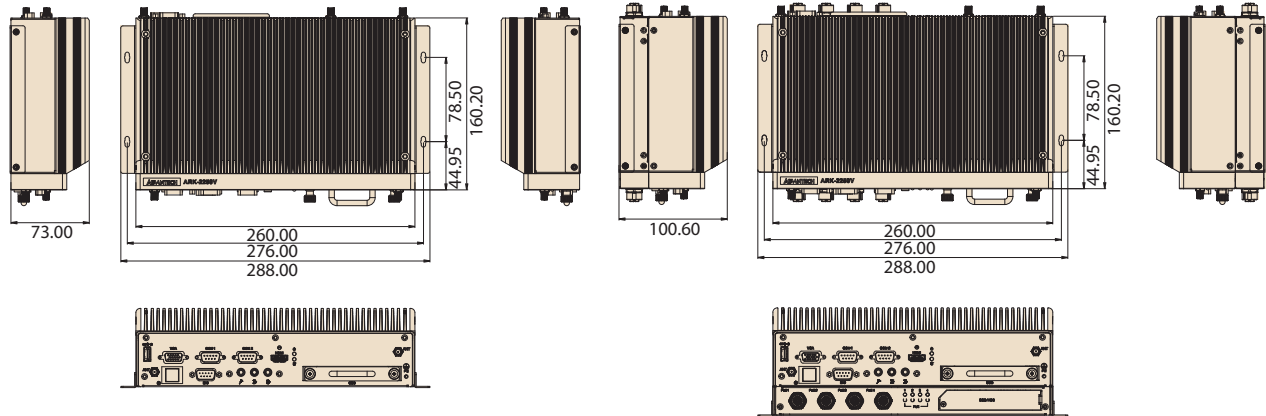

Front Panel External I/O Mechanical Layout/Drawing

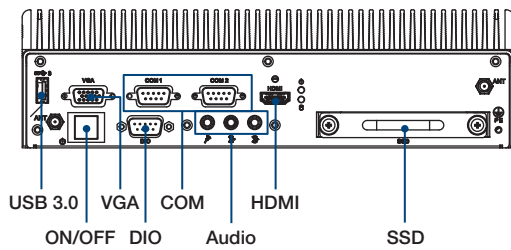

Rear Panel External I/O Mechanical Layout/Drawing

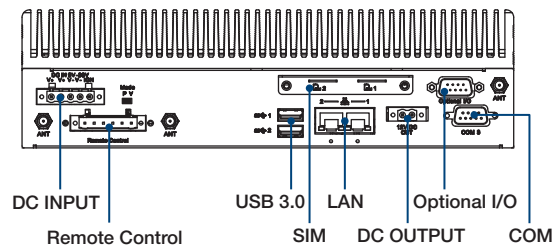

Ordering Information

Part No.	CPU	VGA	HDMI	GbE	USB 3.0	DIO	RS-232/422/485	Audio	MiniPCIe	M.2	SIM	mSATA	2.5" SATA Drive Bay	Power Input	Operating Temp.
ARK-2250S-U0A1E	Intel Core i7-6822EQ QC	1	1	2	3	4Di, 4Do	3	Lin-out, Line-in, MIC	2	1	2	1	1	9-36 V _{DC}	-20 ~ 70 °C
ARK-2250S-S9A1E	Intel Core i5-6442EQ QC	1	1	2	3	4Di, 4Do	3	Lin-out, Line-in, MIC	2	1	2	1	1	9-36 V _{DC}	-20 ~ 70 °C

Note: Memory, storage and operating system bundled by request.

Packing List

Part Number	Description
-	1 x ARK-2250S Unit
-	1 x User Manual (Simplified Chinese)
-	1 x China RoHS

Optional Embedded OS

Part Number	Description
TBD	WES7E 64bit ENG/T-CH/S-CH/JP
TBD	WES8E 64bit ENG/T-CH/S-CH/JP

Note: Default BIOS is for 64bit OS support only. 32bit OS will need to update BIOS

Optional Item for Default SKU

Part Number	Description
TBD	AC-to-DC Adapter, DC24V/150W
1702002600	Power cable 3-pin 183cm, USA type
1702002605	Power cable 3-pin 183cm, EU type
1702031801	Power cable 3-pin 183cm, UK type

ARK-R Extended Modules

ARK-2250S+AMK-R100E

Extra 8 x GbE PoE + removable 2.5" drive bay



Specifications

General	
Bus interface	MIOe
PoE	8 x 10/100/1000Base T(X) PoE, 802.3at compliant
Drive bay	1 x Removable 2.5" drive bay
Mechanical	
Dimension	260 x 26.5 x 160.2
Environment	
Operating temperature	-40 ~ 70 °C, EN50155 TX
Shock/Vibration	IEC61373 Category1, Class B

Ordering Information

P/N	Description
AMK-R100E	8 x GbE PoE M12 X-coded, 1 x removable 2.5" drive bay

ARK-2250S+AMK-R102E

Extra 4 x Isolated RS-232/422/485+ removable 2.5" drive bay



Specifications

General	
Bus interface	MIOe
COM	4 x Isolated RS-232/422/485
DIO	16bit Isolated DIO
Drive bay	1 x Removable 2.5" drive bay
Mechanical	
Dimension	260 x 26.5 x 160.2
Environment	
Operating temperature	-40 ~ 70 °C, EN50155 TX
Shock/Vibration	IEC61373 Category1, Class B

Ordering Information

P/N	Description
AMK-R102E	4 x COM port, 1 x DIO, 1 x removable 2.5" drive bay

ARK-2250S+AMK-R104E

Extra 8 x 10/100 Mbps PoE + removable 2.5" drive bay



Specifications

General	
Bus interface	MIOe
PoE	8 x 10/100 Base T(X) PoE, 802.3at compliant
Drive bay	1 x Removable 2.5" drive bay
Mechanical	
Dimension	260 x 26.5 x 140
Environment	
Operating temperature	-40 ~ 70 °C, EN50155 TX
Shock/Vibration	IEC61373 Category1, Class B

Ordering Information

P/N	Description
AMK-R104E	8 x 10/100 Mbps PoE M12 D-Coded, 1 x removable 2.5" drive bay

ARK-2250S+AMK-R101E

Extra 4 x GbE PoE + removable 2.5" drive bay



Specifications

General	
Bus interface	MIOe
PoE	4 x 10/100/1000Base T(X) PoE, 802.3at compliant
Drive bay	1 x Removable 2.5" drive bay
Mechanical	
Dimension	260 x 26.5 x 160.2
Environment	
Operating temperature	-40 ~ 70 °C, EN50155 TX
Shock/Vibration	IEC61373 Category1, Class B

Ordering Information

P/N	Description
AMK-R101E	4 x GbE PoE M12 X-coded, 1 x removable 2.5" drive bay

ARK-2250S+AMK-R103E

Extra 2 x Isolated RS-232/422/485 + removable 2.5" drive bay



Specifications

General	
Bus interface	MIOe
COM	2 x Isolated RS-232/422/485
DIO	16bit Isolated DIO
Drive bay	1 x Removable 2.5" drive bay
Mechanical	
Dimension	260 x 26.5 x 160.2
Environment	
Operating temperature	-40 ~ 70 °C, EN50155 TX
Shock/Vibration	IEC61373 Category1, Class B

Ordering Information

P/N	Description
AMK-R103E	2 x COM port, 1 x DIO, 1 x removable 2.5" drive bay

ARK-2250S+AMK-R105E

Extra 4 x 10/100 Mbps PoE + removable 2.5" drive bay



Specifications

General	
Bus interface	MIOe
PoE	4 x 10/100 Base T(X) PoE, 802.3at compliant
Drive bay	1 x Removable 2.5" drive bay
Mechanical	
Dimension	260 x 26.5 x 140
Environment	
Operating temperature	-40 ~ 70 °C, EN50155 TX
Shock/Vibration	IEC61373 Category1, Class B

Ordering Information

P/N	Description
AMK-R105E	4 x 10/100 Mbps PoE M12 D-Coded, 1 x removable 2.5" drive bay