

# Full IP65 LCD


## USB Type-C Display

15" (4:3)

### Specifications



Model Name	R15L600-GSC3-C
Panel Size	15"
Active Display Area (mm)	304.1 (H) x 228.1 (V)
Resolution	1024x768
Brightness	250 (Typical) nits
Contrast Ratio	2000:1 (Typical)
Viewing Angle (CR>=10 L/R/U/D)	-88~88 (H) ; -88~88 (V)
Display Colors	16.2M (6 bits/color)
Standard Input Signal	1 x USB Type-C connector
Touch Screen	Projected Capacitive Touch (USB) Protection Glass (Optional)
Speakers	2 x Speaker
OSD	5 Keys: -, +, Power, Esc, Enter
Power Source	USB Type-C Alt mode Power source needs to support 5V/3A
Power Consumption	12W typical, Normal operation
Operating Temperature	0~50°C
Storage Temperature	-10~60°C
Accessories	1 x USB Type-C cable (waterproof)
IP Rating	Full IP65
Certifications	CE, FCC

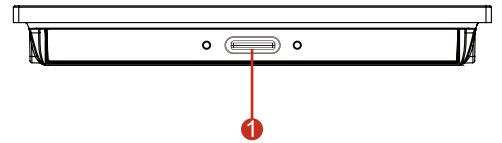

1. USB Type-C Connector
2. OSD Button

### Mechanical Drawing

