



UA-2641M

UA Series IIoT Communication Server 2 Ethernet Ports

■ Features

- OPC UA Server
- MQTT Client Service
- MQTT Broker Inside (non-SSL & SSL/WebSocket)
- Support to Execute OPC UA and MQTT Communication at the Same Time
- Provide Modbus TCP/Serial Master communication protocol
- Support Local Data Logger / Remote Database
- Support IFTTT Logic Control & APP Notify
- Support PID Logic Operation
- Support SNMP, RESTful Communication
- ARM Quad-Core CPU, 1.0 GHz
- 1 GB SDRAM and 8 GB eMMC Flash
- 2 x 10/100/1000 Mbit/s Ethernet Port
- 4 Serial Ports (RS-232/RS-485)









■ Introduction

UA-2600 Series is a series of IIoT (Industrial IoT) Communication Server for integrating the system and devices of IT and OT. UA features the IIoT Gateway function that allows users to access the remote I/O modules and controllers via Modbus TCP/RTU/ASCII, MQTT, and EtherNet/IP communication protocols. IIoT gateway function can also convert these I/O data to OPC UA or MQTT protocols for the needs of connecting with the MES, ERP, SCADA and Cloud services. Besides, UA features the Data Logger function that allows users to write the I/O data directly into the remote database (MS SQL / MySQL / MariaDB), and save to the local file (.csv) as the historical records. UA supports Cloud platform that can connect to Amazon AWS, Microsoft Azure or other Cloud platforms to send over the I/O data; and support Cloud logic service platform "IFTTT" which can connect many web APPs that allows users to receive first-hand notification messages through the most commonly used mobile APPs when an event triggered. UA Series enhances the networking and interoperability between IT and OT. Through UA series, users can easily deploy for Industrial IoT.

System Architecture



ICP DAS CO., LTD Website: http://www.icpdas.com Vol. 2022.07 1/4

■ Hardware Specifications

| Model | UA-2641M | |
|---------------------------|---|--|
| Main Unit | | |
| CPU | ARM Quad-Core 1.0 GHz | |
| System Memory | · DDR3 SDRAM 1 GB | |
| Storage | Flash 8 GB microSD socket with one 4 GB microSD card (support up to 32 GB microSDHC card or 2 TB microSDXC card) mSATA Socket, Solid-state drive (SSD) can be expanded by accessories | |
| Non-Volatile Memory | · FRAM 64 KB · MRAM 128 KB | |
| Real Time Clock | Provide second, minute, hour, date, day of week, month, year | |
| Display | | |
| Signal | VGA (Analog RGB), reserved | |
| LED Indicators | | |
| Status | PWR (Power), RUN (Running), L1, L2, L3 | |
| COM Ports | | |
| Console Port | RS-232 (RxD, TxD and GND); Non-isolated | |
| COM 2 | RS-232 (RxD, TxD and GND); Non-isolated | |
| COM 3 | RS-485 (Data+, Data-); 2500 VDC isolated | |
| COM 4 | RS-485 (Data+, Data-); 2500 VDC isolated | |
| Ethernet | | |
| Ports | 2 x RJ-45, 10/100/1000 Based-TX (Auto-negotiating, Auto MDI/MDI-X, LED indicators) | |
| USB | | |
| Connector | 2 x 2.0 host | |
| нмі | | |
| Rotary Switch | 1 x 10 Position (0 ~ 9) | |
| Port Expansion | | |
| Expansion Bus | 1, for one optional XV-board (Support XV511i to expand 4 RS-485 ports) | |
| Power | | |
| Input Range | +12 ~ +48 VDC | |
| Consumption | 10 W | |
| Mechanical | | |
| Casing | Metal | |
| Dimensions (mm) | 35 x 167 x 119 (W x L x H) | |
| Installation | DIN-Rail Mounting | |
| Environmental | | |
| Operating Temperature | -25 ~ +75°C | |
| Storage Temperature | -40 ~ +80°C | |
| Ambient Relative Humidity | 10 ~ 90% RH (non-condensing) | |

ICP DAS CO., LTD Website: http://www.icpdas.com Vol. 2022.07 2/4



■ Software Specifications


| Model | UA-2641M |
|-------------------------|--|
| os | |
| Linux | Linux Kernel 4.1.15 |
| Protocol | |
| OPC UA Server | OPC Unified Architecture: 1.02 Core Server Facet Data Access Server Facet Method Server Facet UA-TCP UA-SC UA Binary User Authentication: Username/Password, X.509 Certificate Security Policy: None Basic128Rsa15 (Sign / Sign & Encrypt) Basic256 (Sign / Sign & Encrypt) Recommend to keep the maximum number of sessions within 40 connections. Max. 8000 Tags. (Note 1) |
| MQTT Broker | Compliance with MQTT v3.1.1 protocol. Support MQTT message distribution management. Recommend to keep the connection number of Client within 400. Max. 1800 Client Devices. (Note 1) |
| MQTT Client | Connect the MQTT Broker to read/control the devices supporting the MQTT protocol. Or connect the MQTT Broker to externally read/control the devices supporting other protocols that linking with the UA series. Max. 400 Connections. (Note 1) |
| Modbus TCP Master | To read or control the devices that support standard Modbus TCP Slave protocol. Recommend to keep the maximum number of devices within 200 connections. (Note 1) |
| Modbus RTU/ASCII Master | A max. of 3 ports: COM2, COM3, COM4 to connect other Modbus RTU Slave devices (e.g. M-7000). Recommend no more than 32 devices per port (32*3 port) for better communication quality. (Note 1) |
| EtherNet/IP Scanner | Support connect EIP-2000 series modules of ICP DAS. Recommend no more than 100 devices per UA. (Note 1) |
| SNMP | Provide SNMP Agent service, for users to external access the devices connected with the UA through the SNMP communication. Max. 10 read commands and 10 write commands at the same time. |
| RESTful | Provide RESTful API service, for users to external access the devices connected with the UA through the HTTP communication. Max. 20 read commands and 1 write command at the same time. |
| Data Logger | |
| Local Data Logger | Record I/O data, and save to the local MicroSD card or SSD in CSV format. |
| Remote Database | Record I/O data, and send to the remote database of MS SQL / MySQL / MariaDB. Recommend Max. 2 Databases per Time, Max. 1000 Tags |
| Function | |
| PID Function | Combine the remote I/O devices for the PID logic control system. |
| Internal Module | Can create virtual variables as an intermediary for reading, writing, or data exchange. |
| IoT Service Integration | |
| Microsoft Azure | MQTT Service can connect to MS Azure IoT Hub for Cloud platform service. |
| Amazon Web Services | MQTT Service can connect to AWS IoT Core for Cloud platform service. |
| IBM Bluemix | MQTT Service can connect to IBM Bluemix for Cloud platform service. |
| IFTTT | Support Logic event sending to IFTTT Web platform. IFTTT Logic Trigger APP (Line, Twitter, Gmail) |
| | · |

Note 1: When using multiple Protocol functions, the user needs to control the device number to under 80% of the CPU usage. Please refer to the CPU Usage of the UA Web UI. (as the figure below)




ICP DAS CO., LTD Website: http://www.icpdas.com Vol. 2022.07 3/4

■ Appearance/Pin Assignment

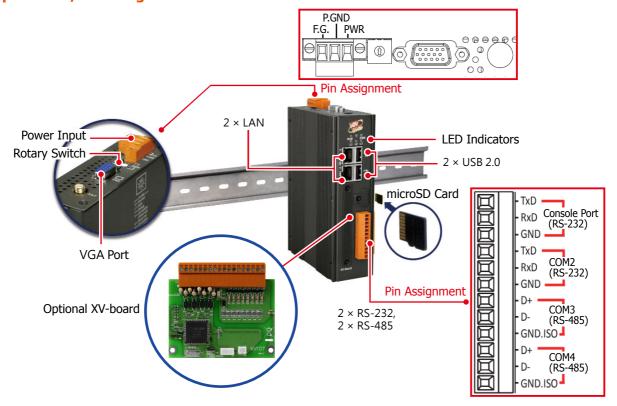

■ Dimensions (Units: mm)

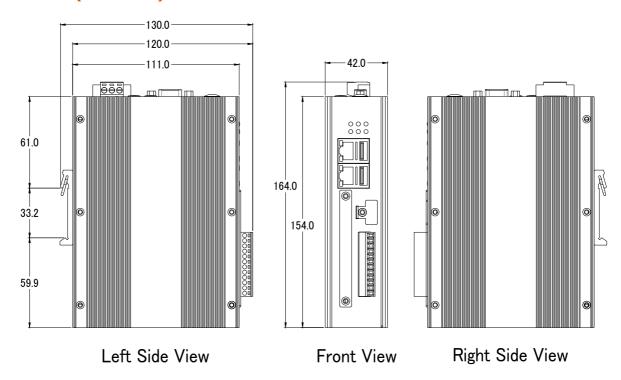

■ Ordering Information

UA-2641M CR IIoT Communication Server (Metal), with Quad-core ARM CPU and 2 Ethernet (RoHS)

Option Accessories

| XV511i CR | 4-channel RS-485 I/O Expansion Board (RoHS) |
|-----------|---|
|-----------|---|

ICP DAS CO., LTD Website: http://www.icpdas.com Vol. 2022.07 4/4